


**Submersible Fountain Pumps
1-3/4" Hose Connection, 1/3, 1/2, 3/4 & 1HP**

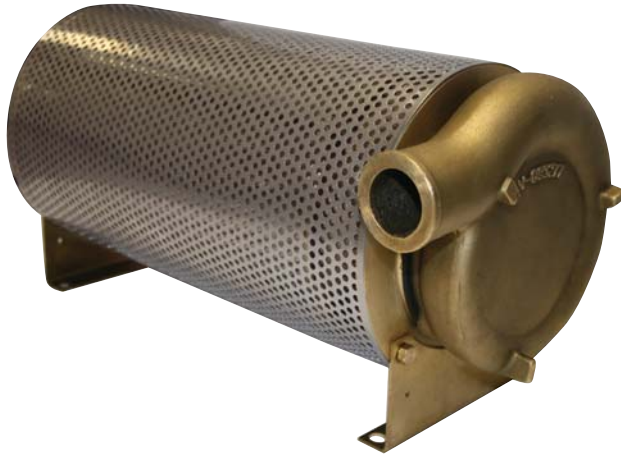

DISCHARGE	1-3/4" Hose Connection, 90° Rotation
LIQUID TEMPERATURE	145°F (63°C) Continuous
VOLUTE	Brass
INTERMEDIATE	Brass
HOUSING TUBE	304 Stainless Steel
HOUSING END PIECE	Brass
SCREEN	304 Stainless Steel
PUMP SUPPORTS	304 Stainless Steel
IMPELLER	1/3 & 1/2HP - Four Vane, Open, Brass 3/4 & 1 HP - Six Vane Open, Brass
SHAFT	416 Stainless Steel
O-RINGS	Buna-N
HARDWARE	300 Series Stainless Steel
SEAL	Single Mechanical, Carbon/Ceramic/Buna-N
POWER CORD	12 Ft.
MOTOR END BEARING	Single Row, Ball, Oil Lubricated
PUMP END BEARING	Sleeve, Oil Lubricated
MOTOR	Oil Filled, Squirrel Cage Induction, NEMA B Design, Class A Insulation
SINGLE PHASE	Permanent Split Capacitor (PSC), Includes Overload Protection in Motor

**Series: PFU31 • PFU51,
PFU71 • PFU102**

**1/3, 1/2, 3/4 & 1HP
3450 RPM • 60 Hz
Submersible Fountain Pumps**

Description


For use in Decorative Water Displays



Series: PFU



Submersible Fountain Pumps 1-3/4" Hose Connection, 1/3, 1/2, 3/4 & 1HP

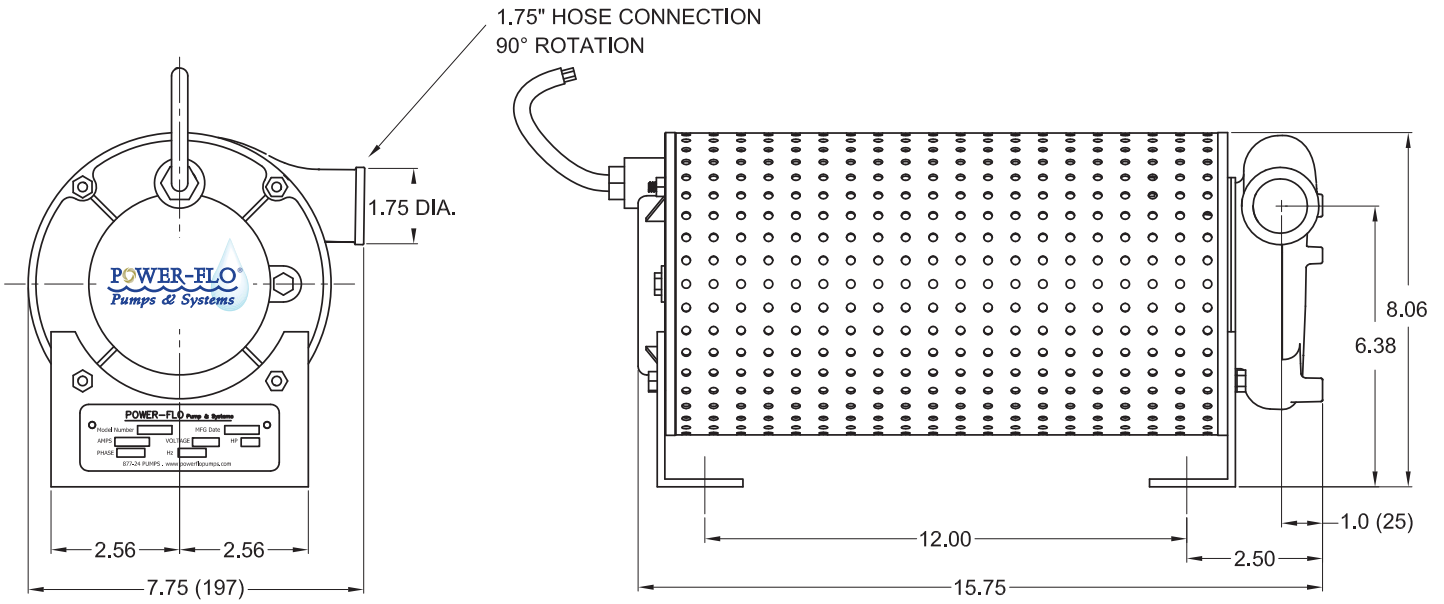

MODEL	HP	Hz	Volts/Ph	RPM	Full Load Amps	Locked Rotor Amps	NEMA Start Code	Cord Type	Cord Size	Cord O.D.
PFU31	1/3	60	115/1	3450	8.0	21.0	J	SOW	16/3	0.395
PFU51	1/2	60	115/1	3450	9.5	21.0	E	SOW	16/3	0.395
PFU71	3/4	60	115/1	3450	12.0	28.0	D	SOW	16/3	0.395
PFU102	1	60	230/1	3450	7.0	21.0	E	SOW	16/3	0.395

